


Release to production.

Update the ELECTRICAL CHARACTERISTICS.

&

				8	Tape & Reel, 5000



1 ,

%		%

(				

(((





(






	(			
--	---	--	--	--


	&			
&				
	%			

		(		
		(		/ L RP Re@9ñ.

řAxF p

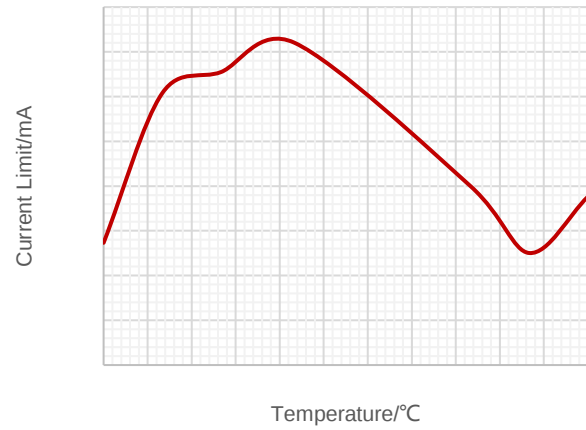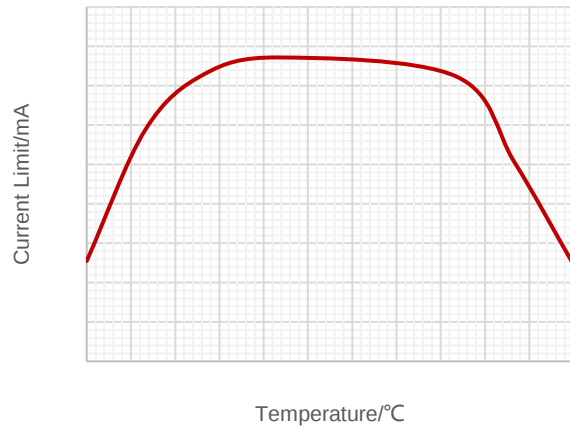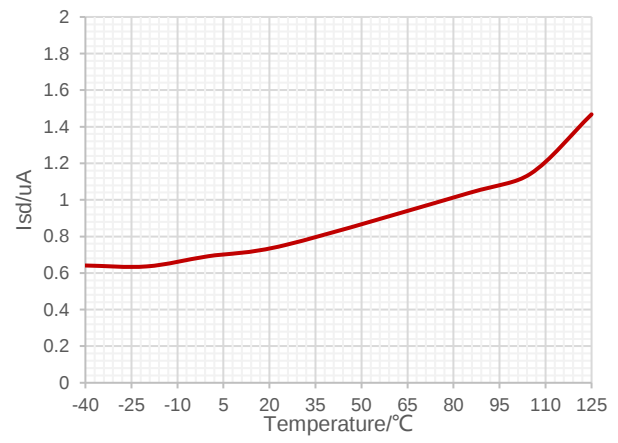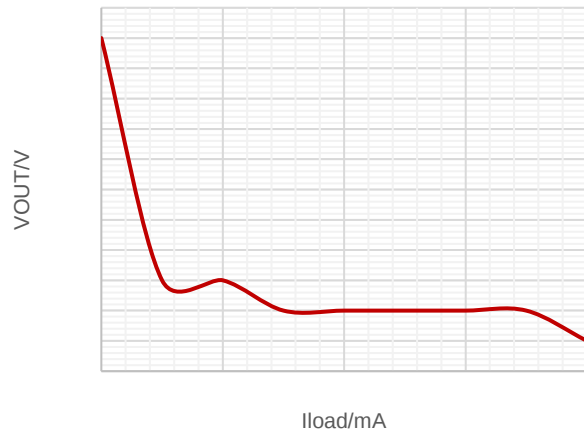

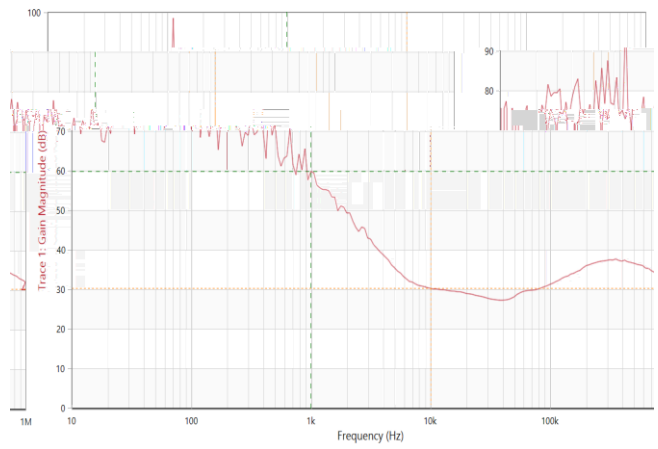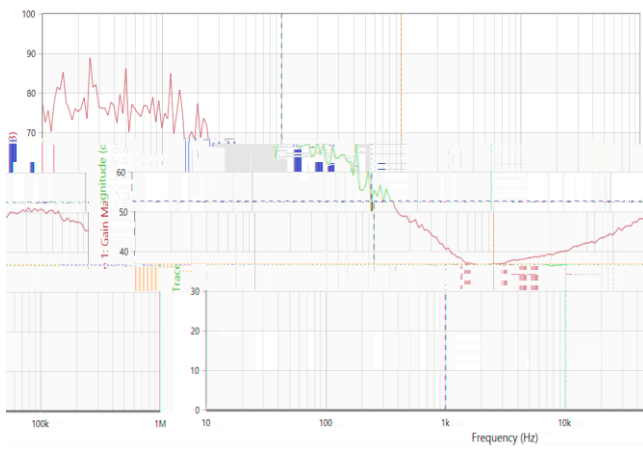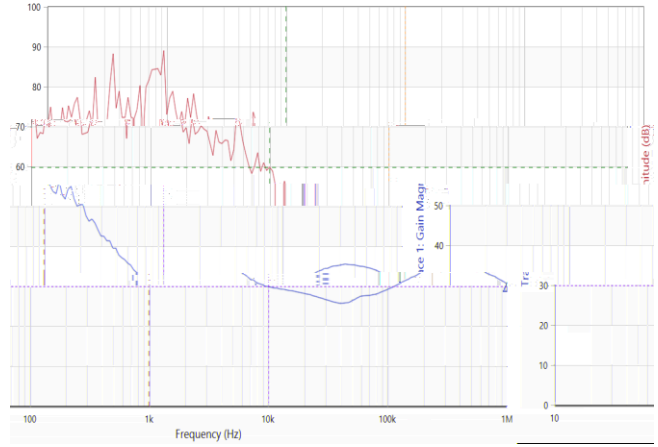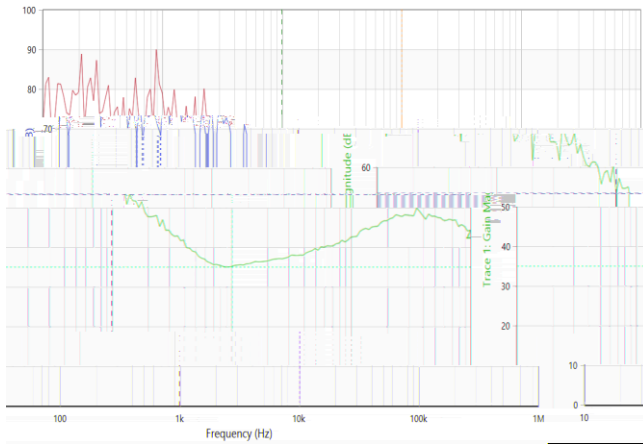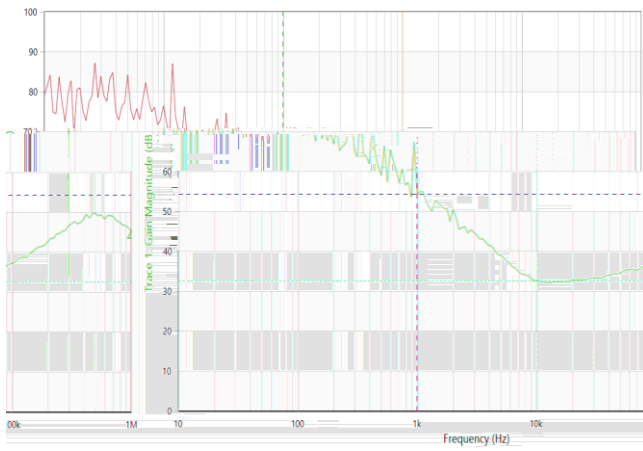

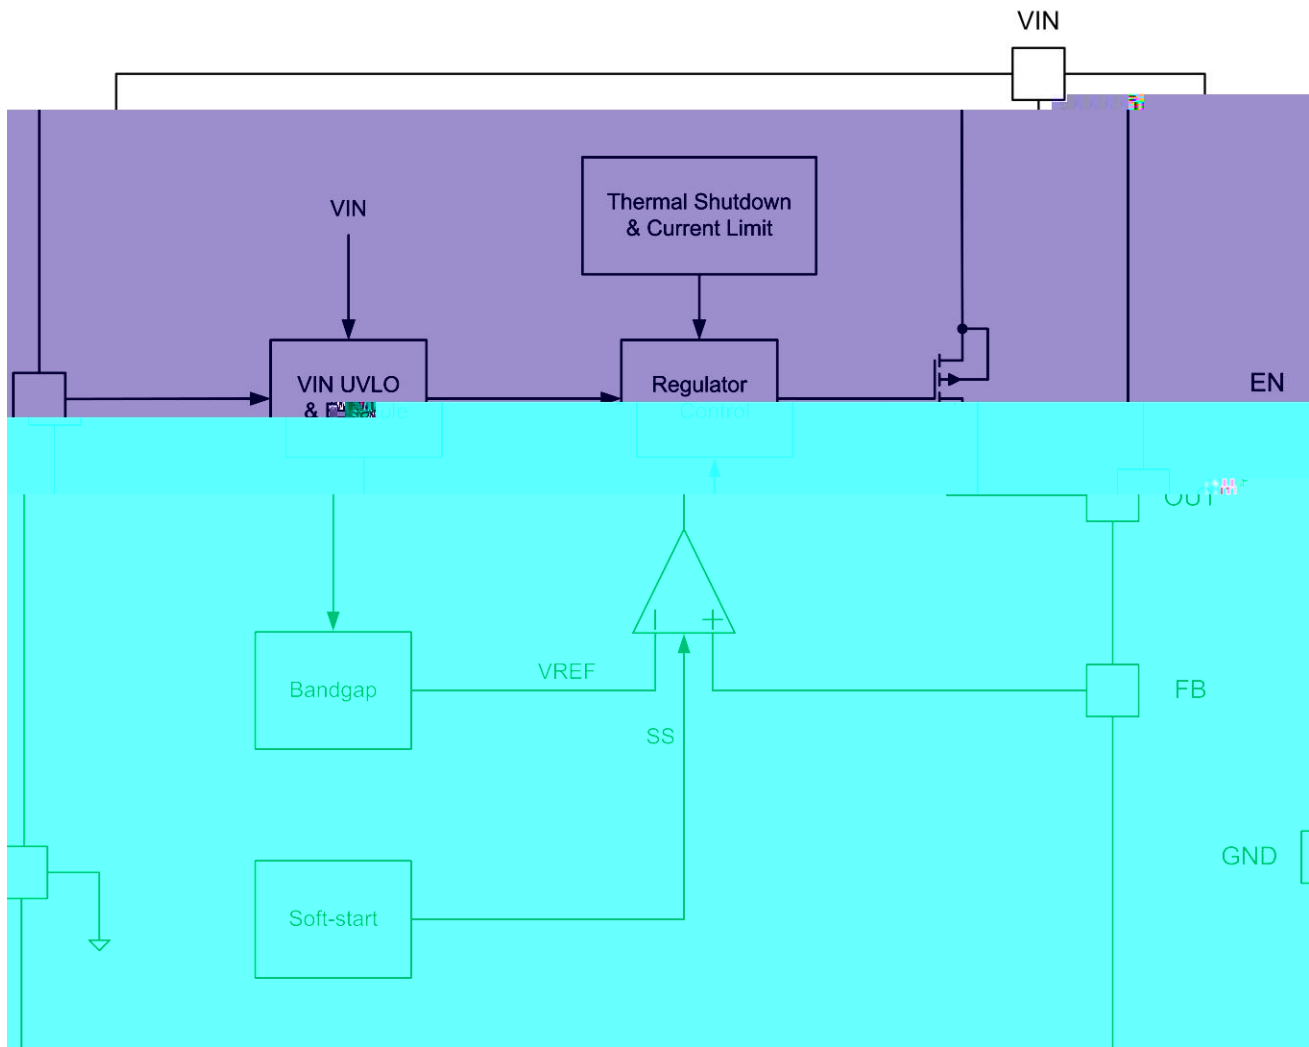


& %&

The SCT71402 series products provide adjustable output version which can adjust the output voltage from 1.215V to 25V


&

%

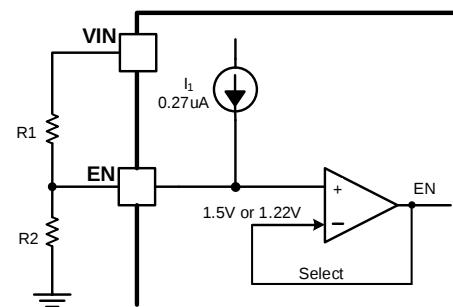


&

4

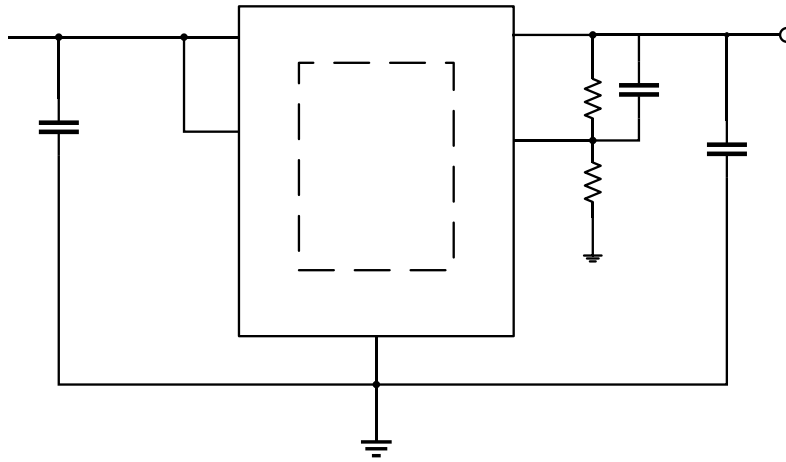

, 4

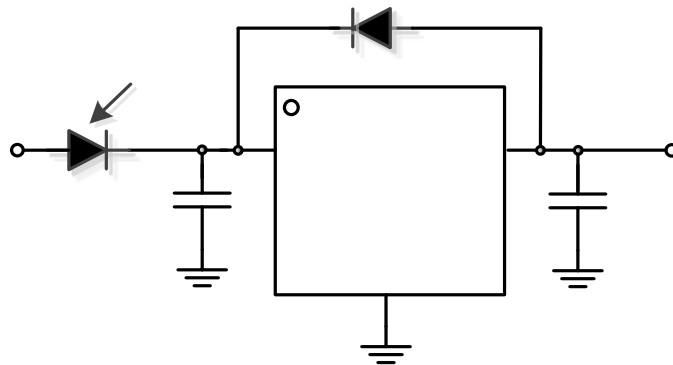


%

%

%

- 4

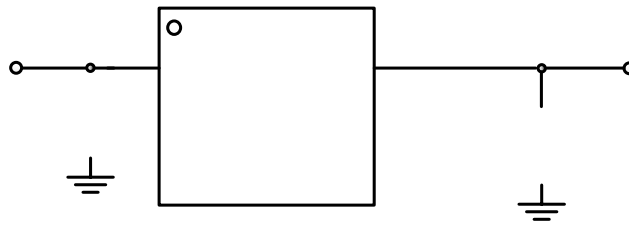

—

4)

%

%


(

(


(

(


	<i>I</i>	, / °C	°C)

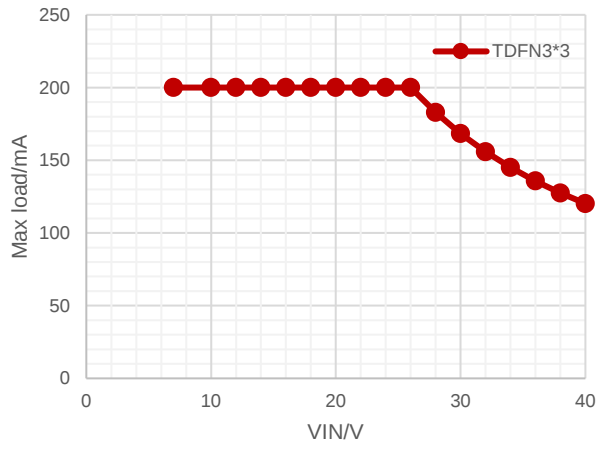







(





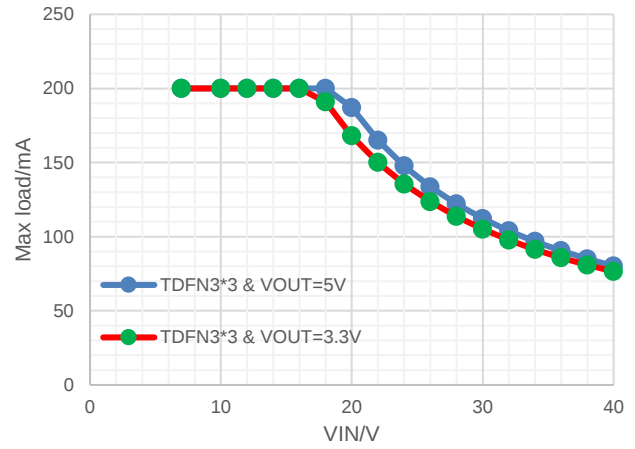


(°C

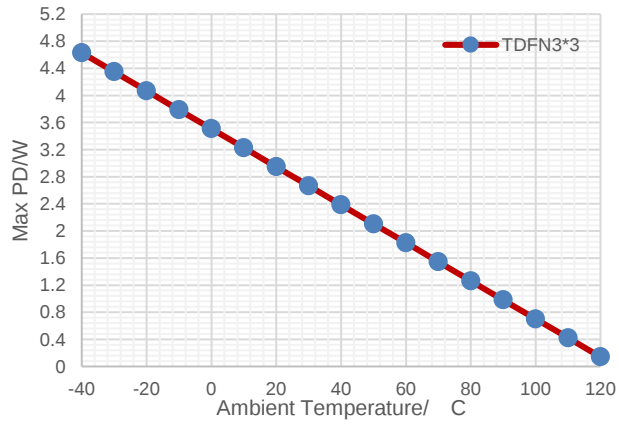

(

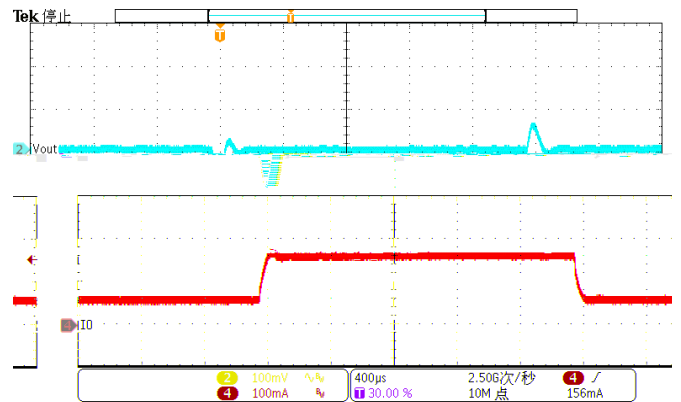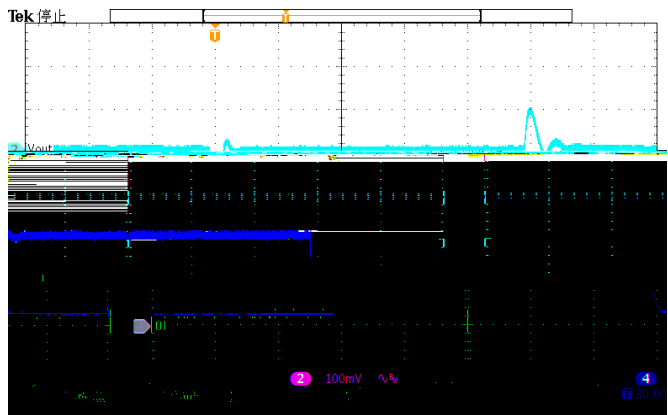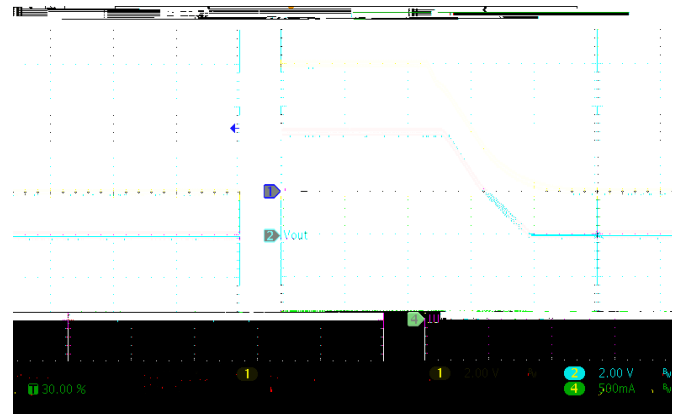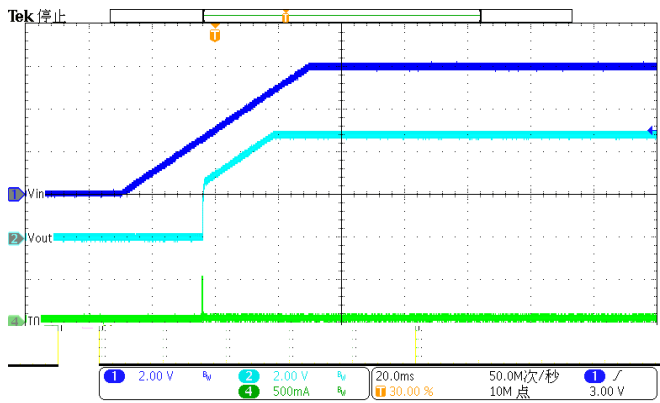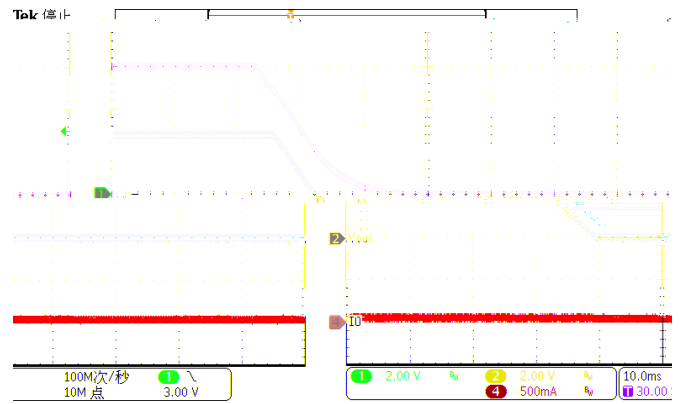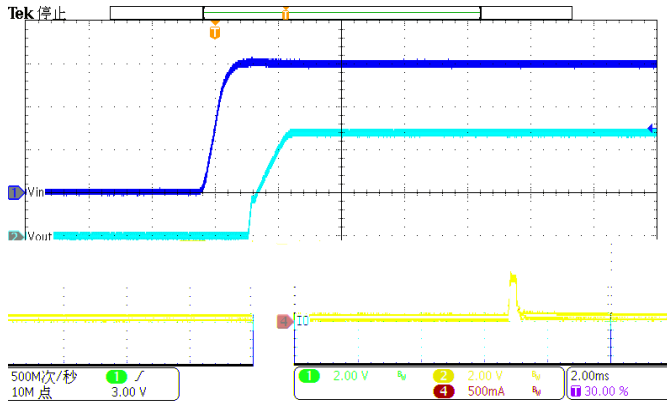

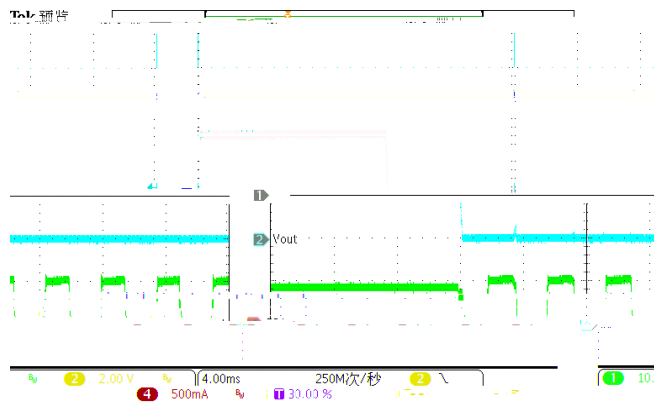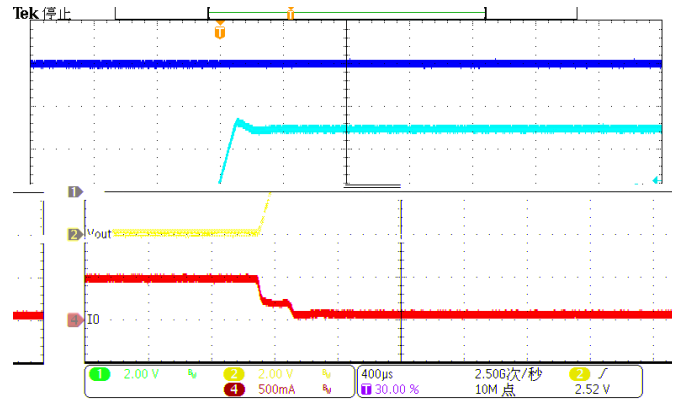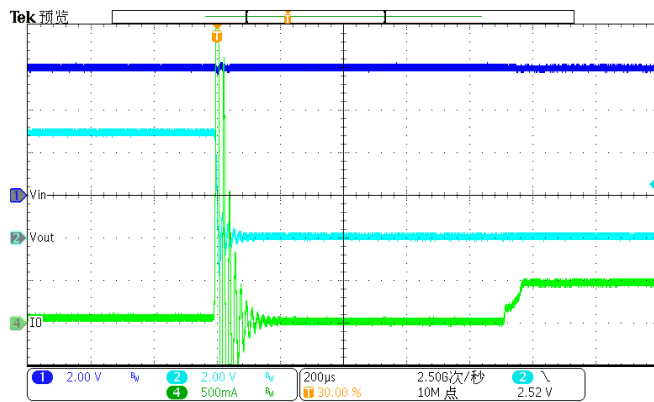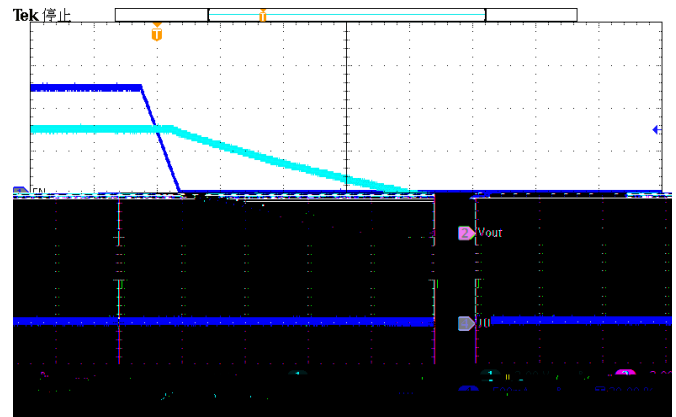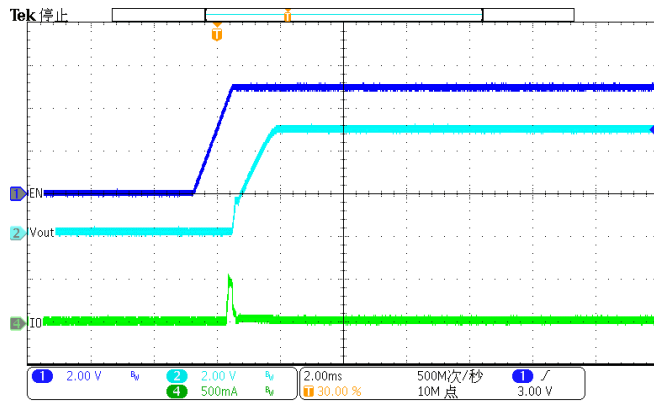

- 1.
- 2.
- 3.
- 4.
- 5.

%

