
5.5V-100V Vin, 1.3A Peak Current Limit, High Efficiency Asynchronous Step-down DCDC Converter

FEATURES


-
-
-
-
-
-
-
-
-
-
-
-
-
-

REVISION HISTORY

DEVICE ORDER INFORMATION

ABSOLUTE MAXIMUM RATINGS

PIN CONFIGURATION

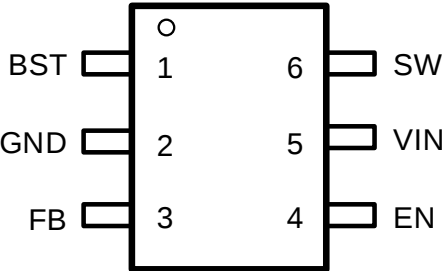


RECOMMENDED OPERATING CONDITIONS

ESD RATINGS


(1)
(2)

THERMAL INFORMATION


TYPICAL CHARACTERISTICS

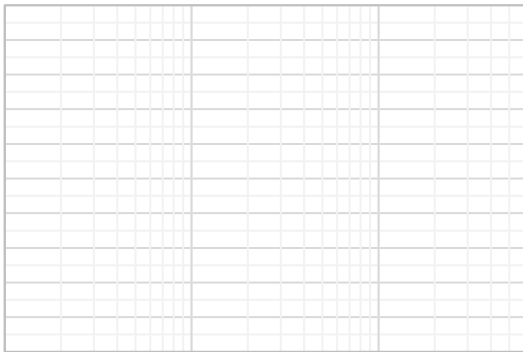

FUNCTIONAL BLOCK DIAGRAM

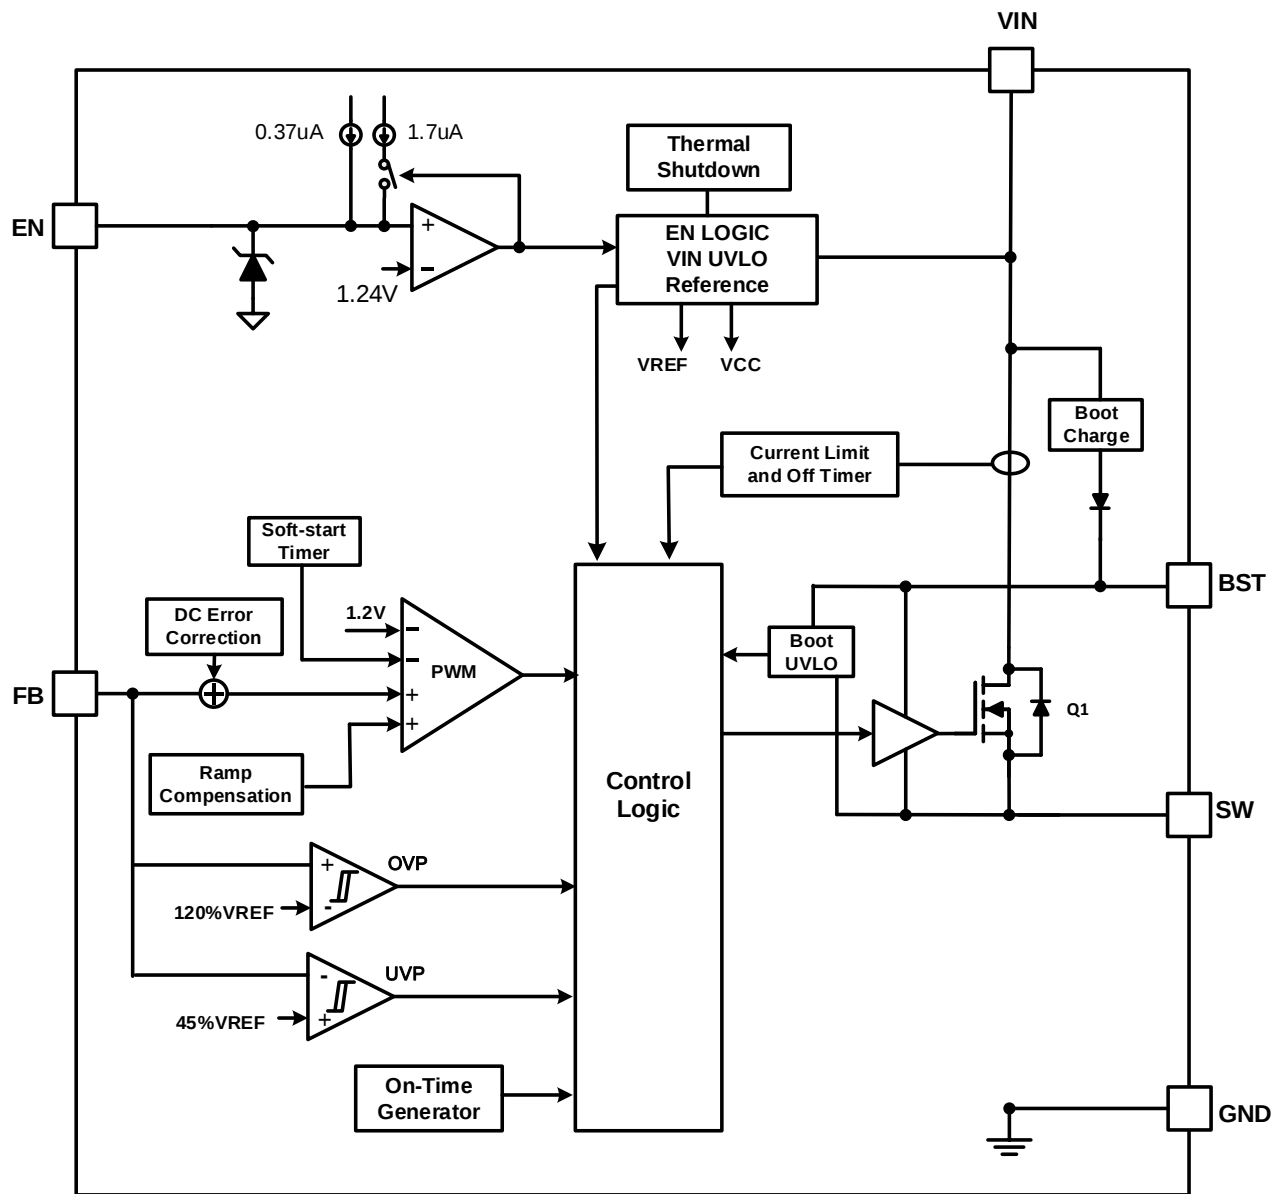

OPERATION

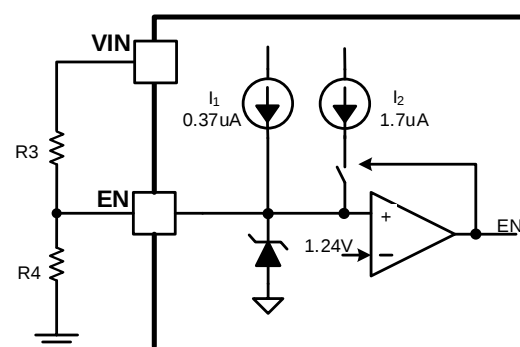

APPLICATION INFORMATION







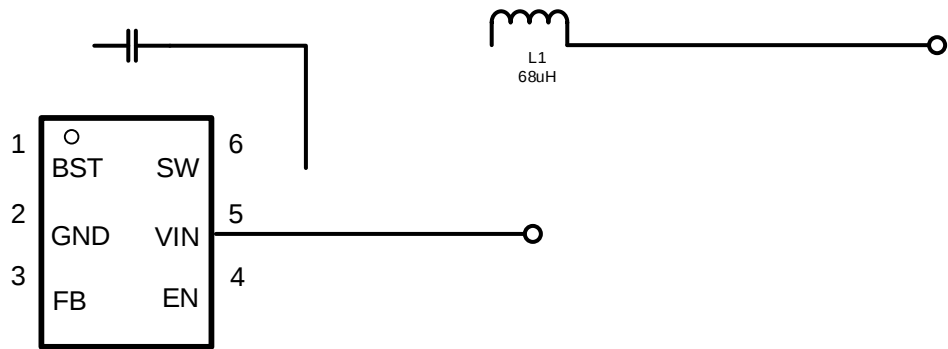


Table 1. R_1 , R_2 Value for Common Output Voltage
(Room Temperature)

-
- -

-
-
-
-
-
-

--	--	--	--	--	--

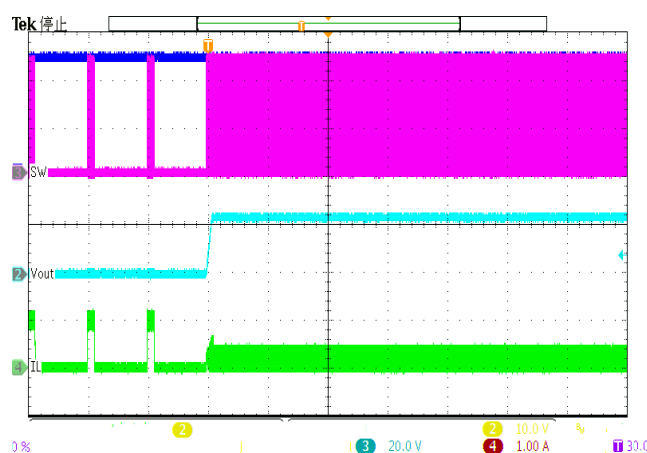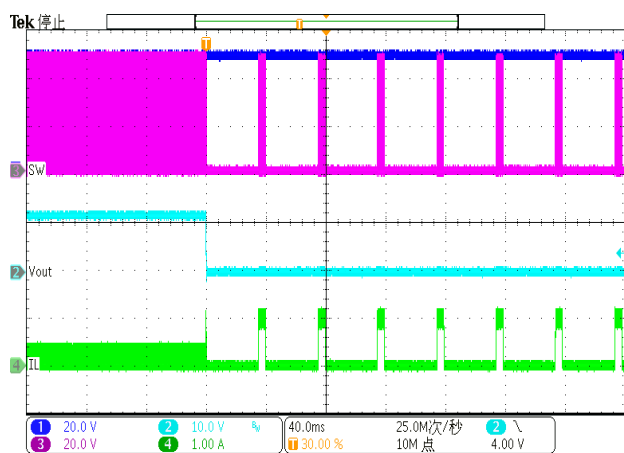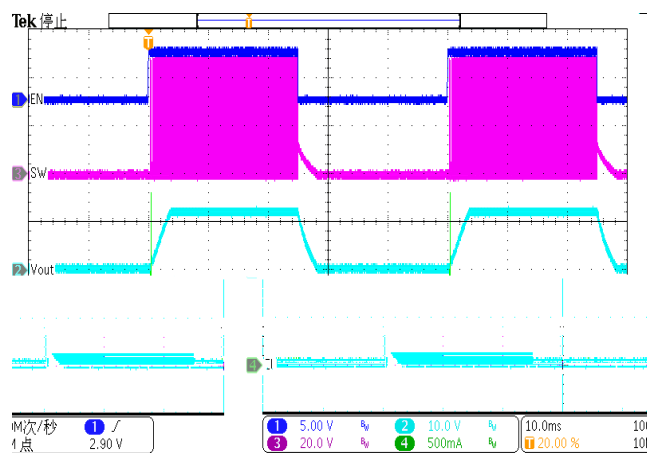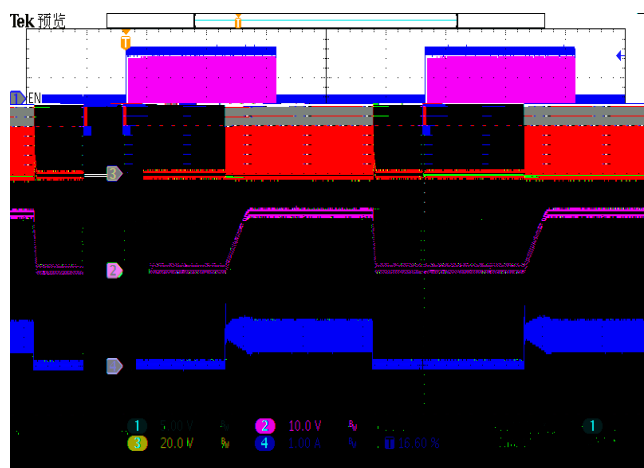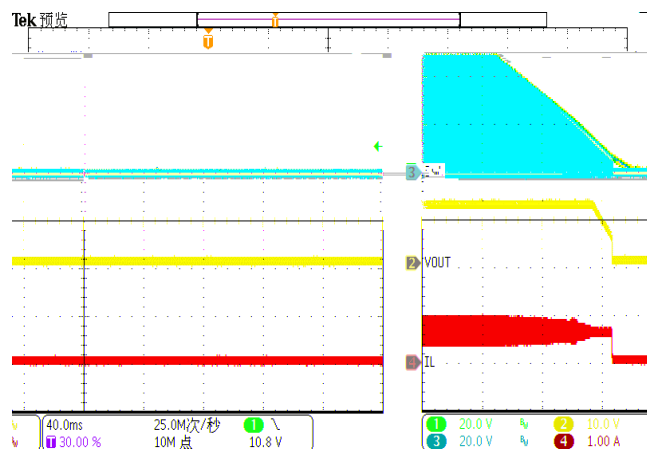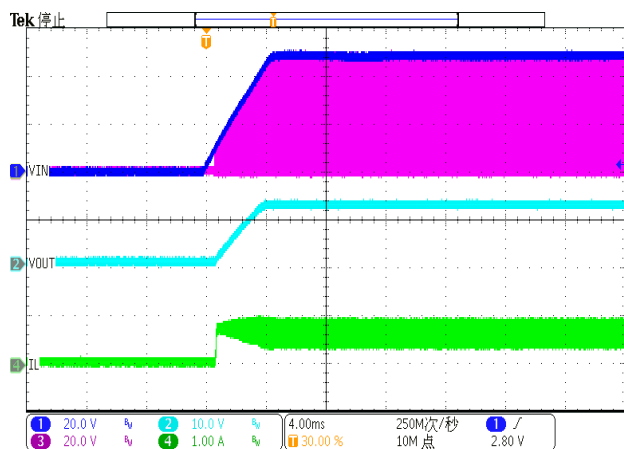

1.

2.


3.

4. Oc h g d g b b i gi ii c b i gi i g d

i i c c c h g D g d b c h g b i g i K d b h g d g c h g d
i c d i b d b c h g a h i D d h h i h d h d c g a c h g
d a i i g b b d i d b i c d i c g g h g c c d

5.

6.

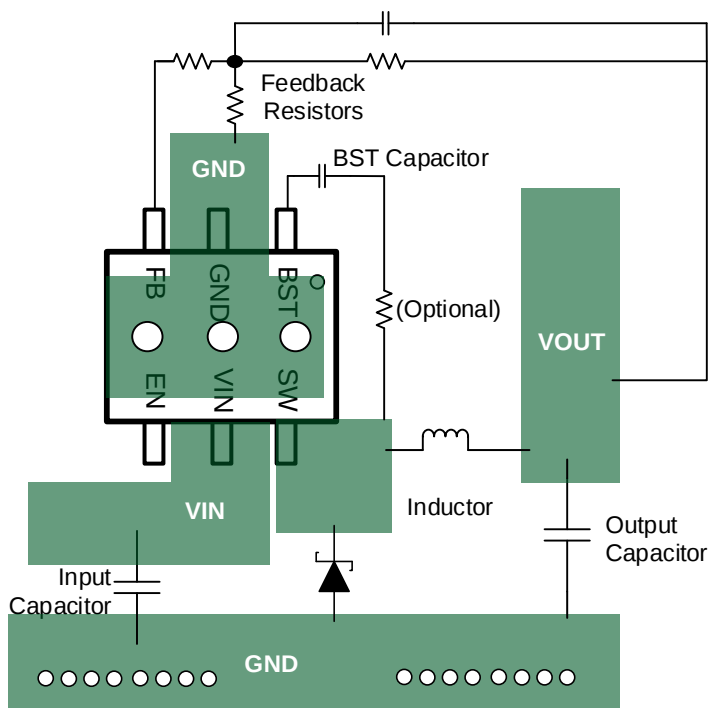

PACKAGE INFORMATION

