


d

D

C

Over operating free-air temperature unless otherwise noted ⁽¹⁾

DESCRIPTION	MIN	MAX	UNIT
VIN, EN	-0.3	47	V
BST	-0.3	54	V
SW	-1	47	V
SW <10ns	-2.5	49	V
BST-SW	-0.3	7	V
FB	-0.3	6	V
Operating junction temperature ⁽²⁾	-40	150	C
Storage temperature T _{STG}	-65	150	C

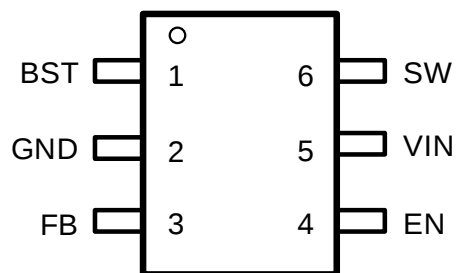


6-Lead Plastic TSOT23-6


(1)

(2)

D



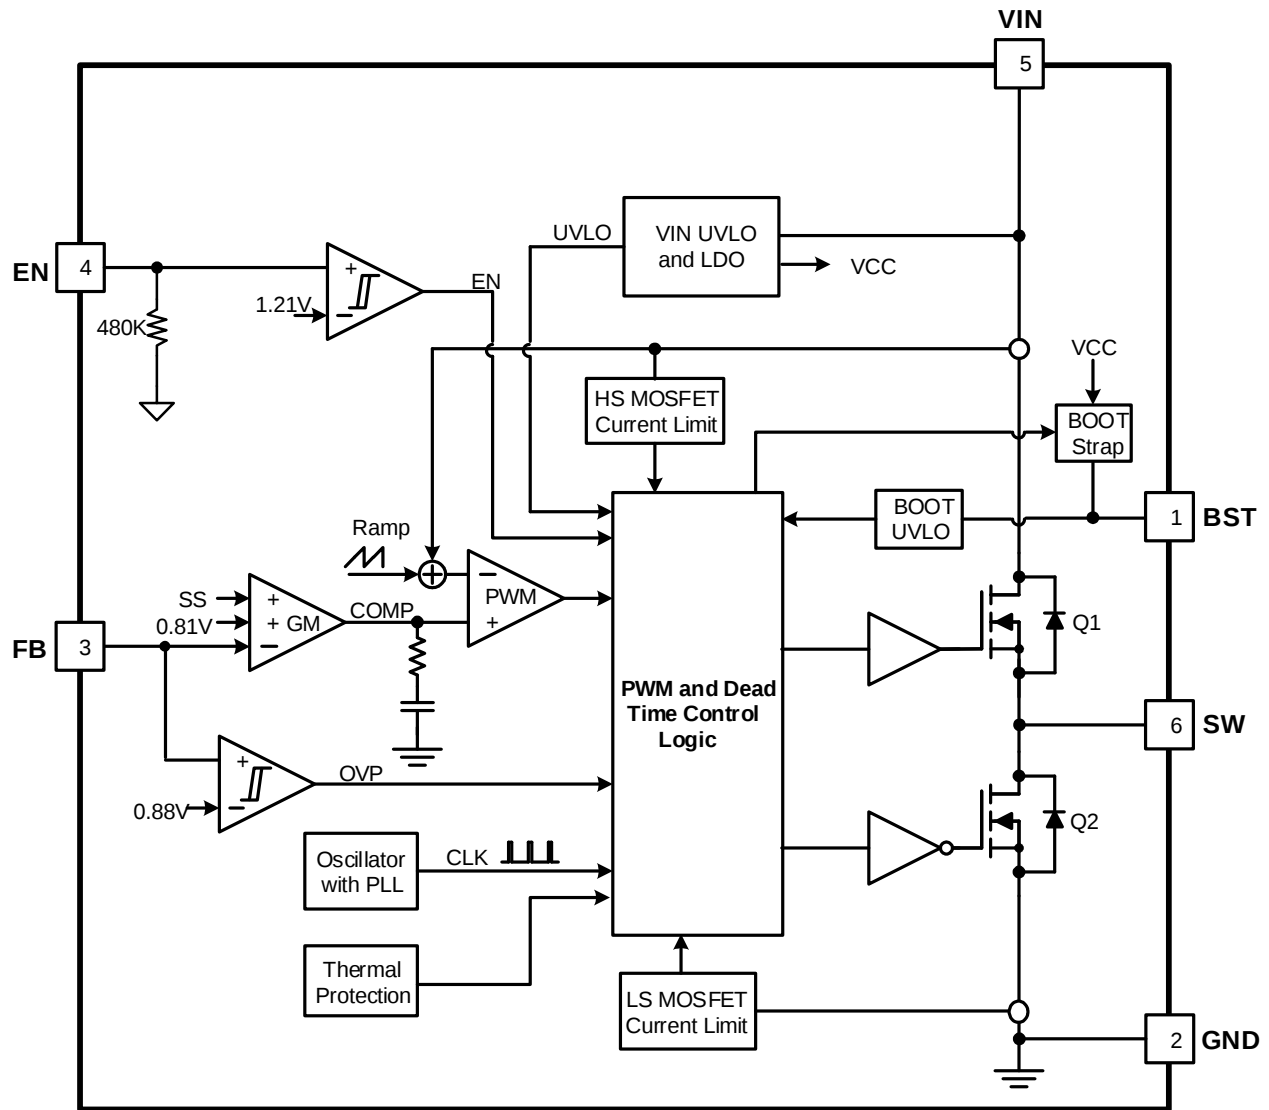


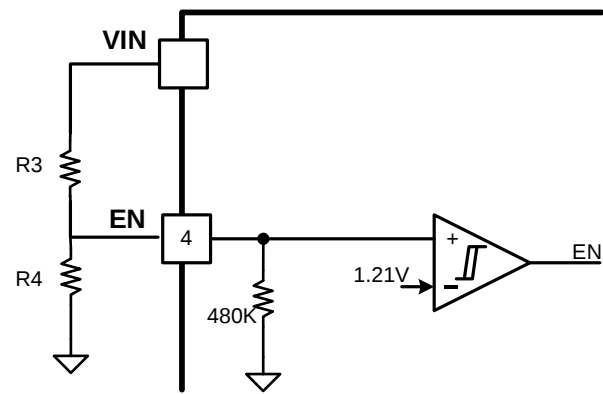



(1)

(2)

—

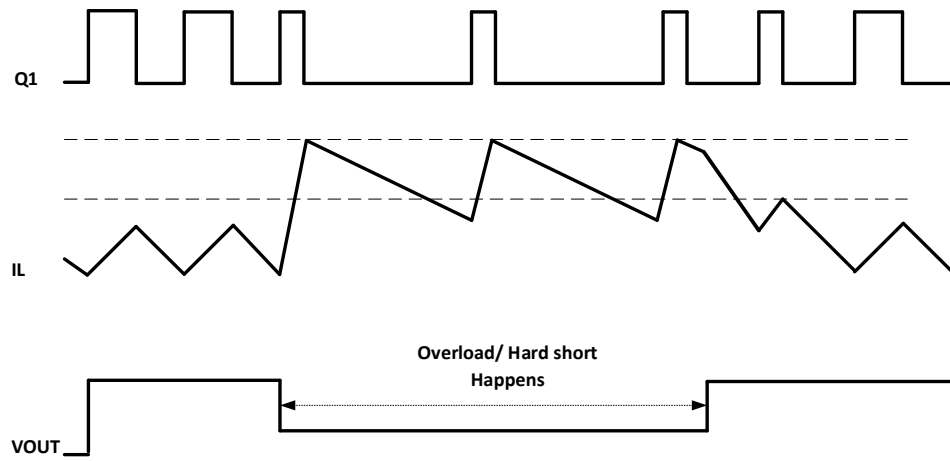

o
o

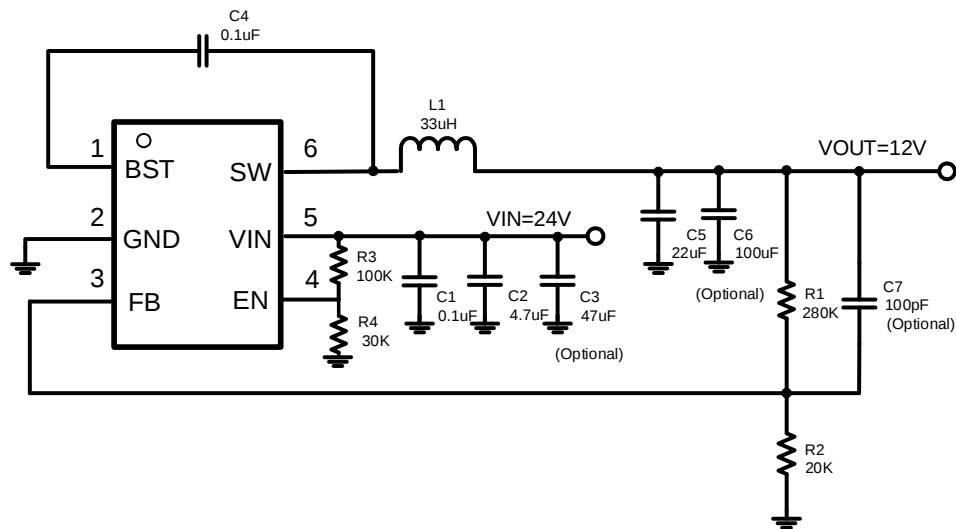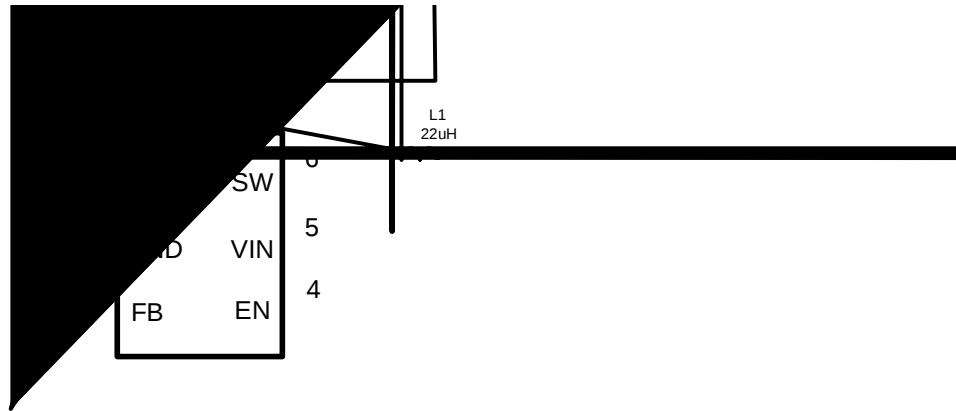

Design Parameters	Example Value
Input Voltage	24V
Output Current	0.6A
Switching Frequency	1.2MHz
Start Input Voltage (rising VIN)	5.5V
Stop Input Voltage (falling VIN)	5V







Table 1. R_1 , R_2 Value for Common Output Voltage
(Room Temperature)

?


?

?

?

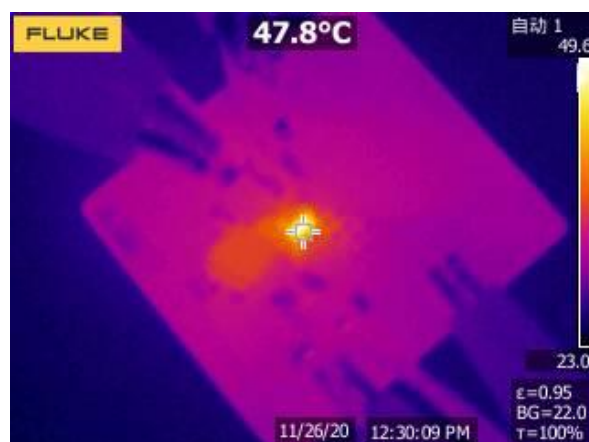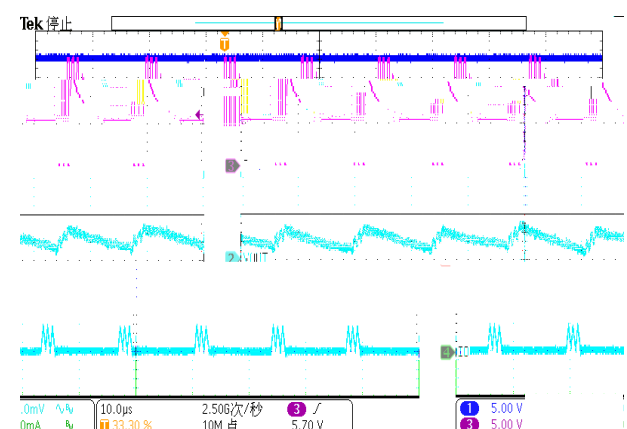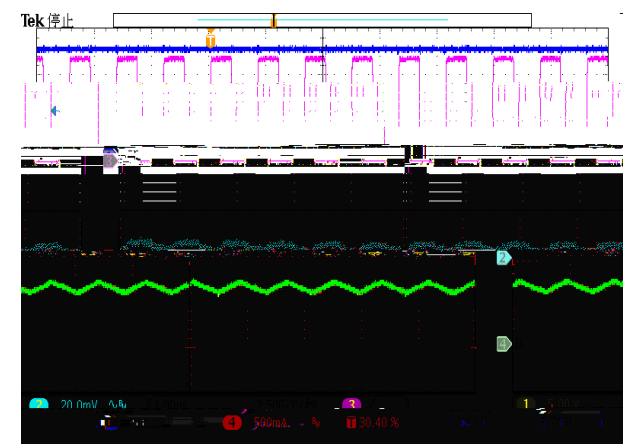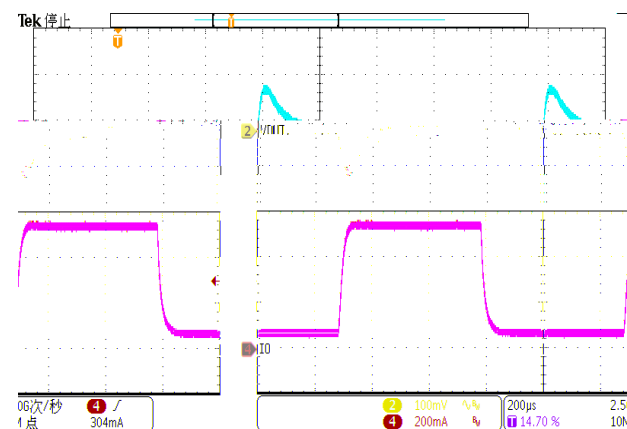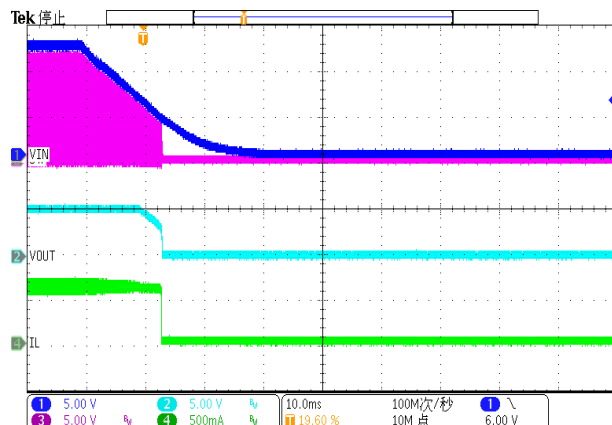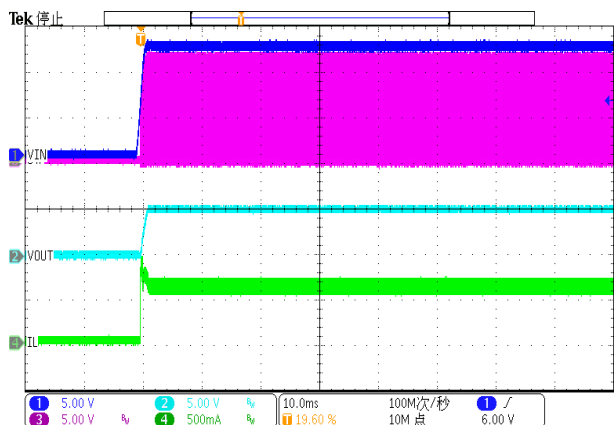

- 1.
- 2.
- 3.
- 4.

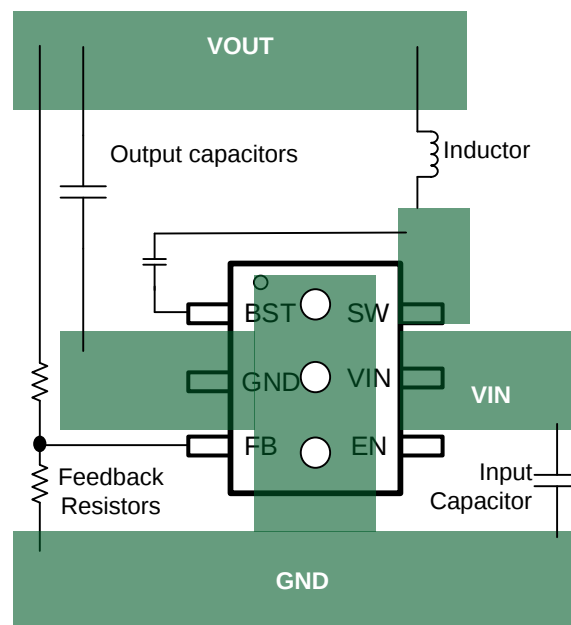



1) ALL I
2) PACI
PROTR
3) PACI
FLASH
4) LEAI
FORMIN

