


- • • • •

5.5V-60V, Asynchronous Buck Converter


(1)

(2)

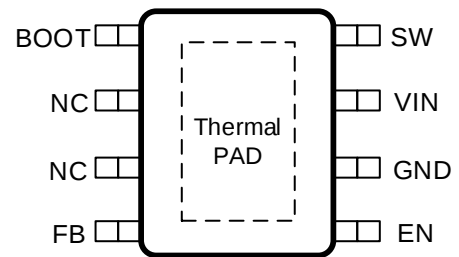

		Enable pin to the regulator with internal pull-up current source. Pull below 1.05V to disable the converter. Float or connect to VIN to enable the converter. The tap of resistor divider from VIN to GND connecting EN pin can adjust the input voltage lockout threshold.
		Ground

--	--	--	--	--

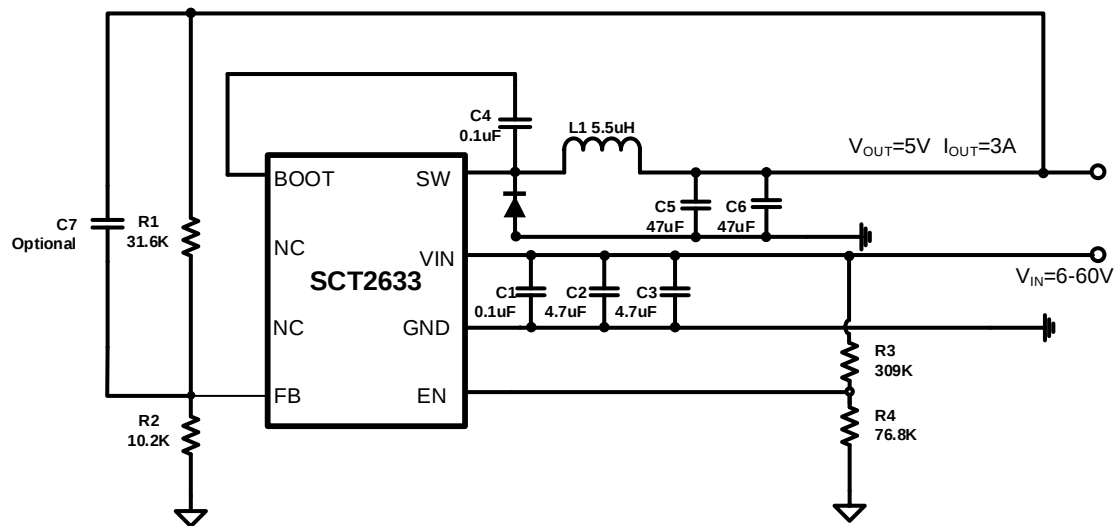

•

-
-
-
-
-

-
-
-
-
-
-

δ M_p ρ M

(PDR510)







..

—

—

—

-
- -
 -
 -
 -
 -

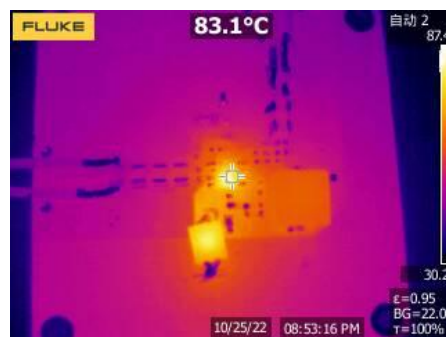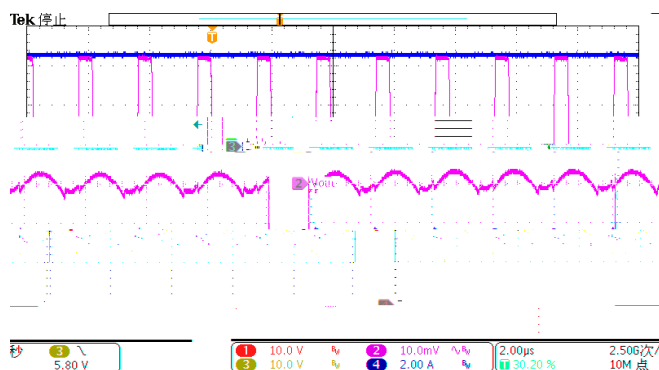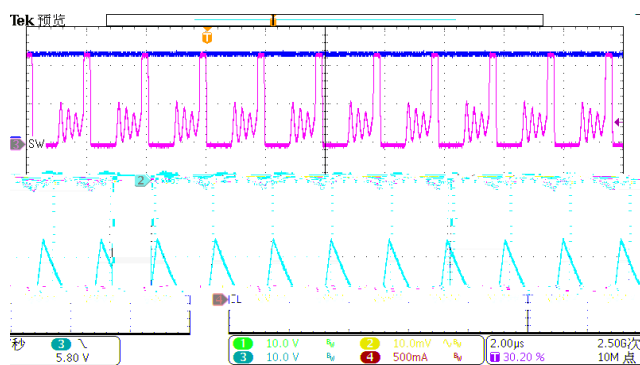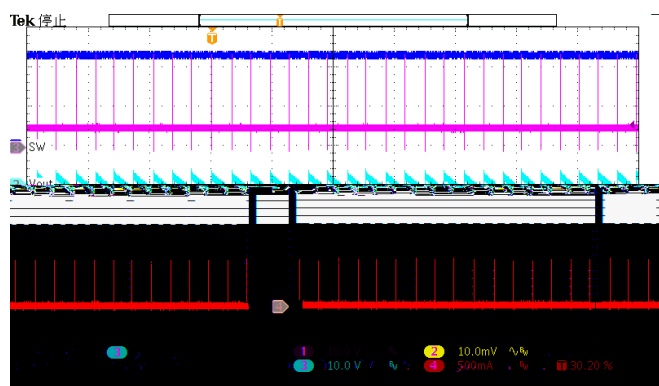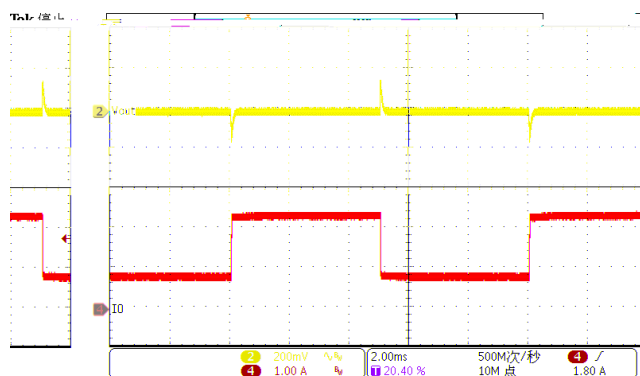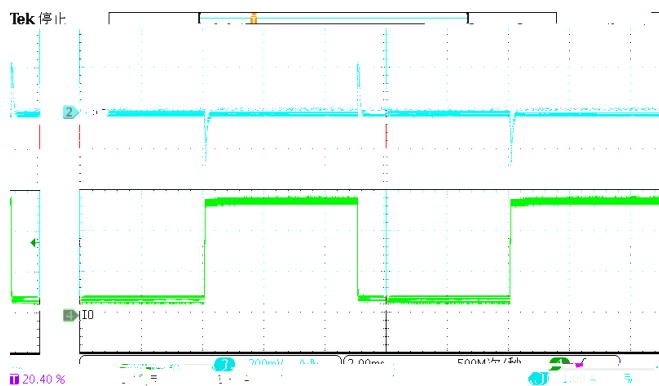

1.

2.

3.

4.

5.

6.

7.

8.

9.

