


SCTC

REVISION HISTORY

DEVICE ORDER INFORMATION

ABSOLUTE MAXIMUM RATINGS

PIN CONFIGURATION

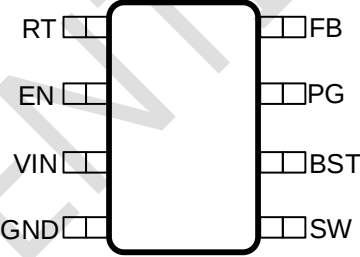

RECOMMENDED OPERATING CONDITIONS

ESD RATINGS


(1)
(2)

THERMAL INFORMATION


SCT CONFIDE

)				
		POWER GOOD (% of FB voltage)		
		POWER BAD (% of FB voltage)		
		POWER BAD (% of FB voltage)		
		POWER GOOD (% of FB voltage)		
)				
)				
)				
)				


TYPICAL CHARACTERISTICS

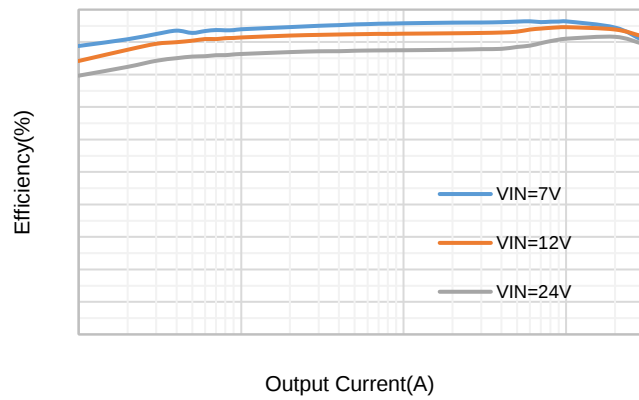


SCTC



SCTCO

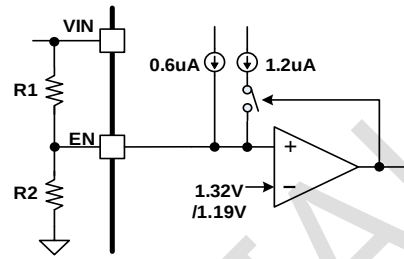




SCT CONFIDENTIAL

)






APPLICATION INFORMATION

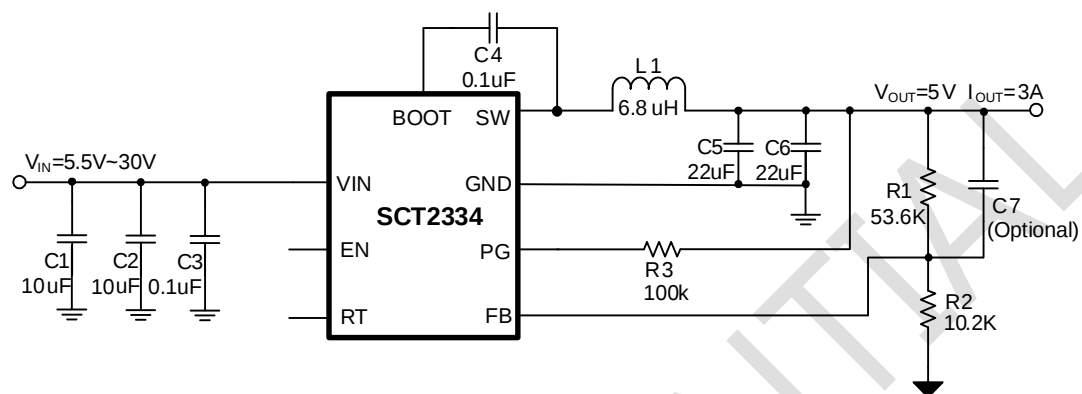

b " (b e e ed f eb
ee f

SCT CONFIDENTIAL

SCT CONF

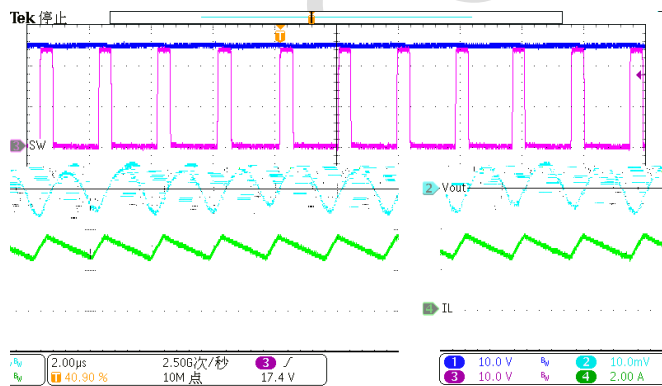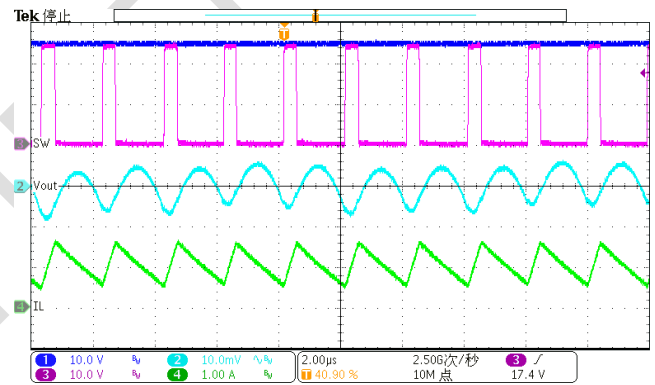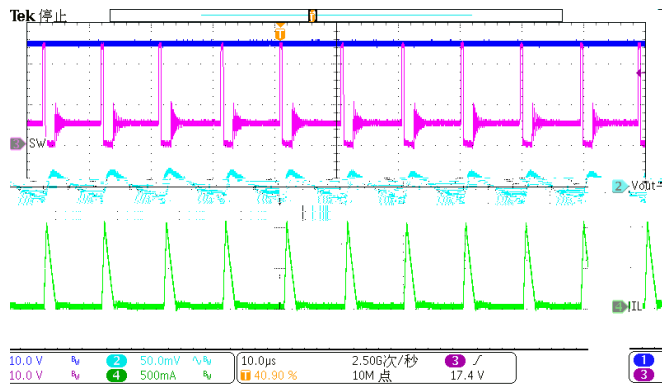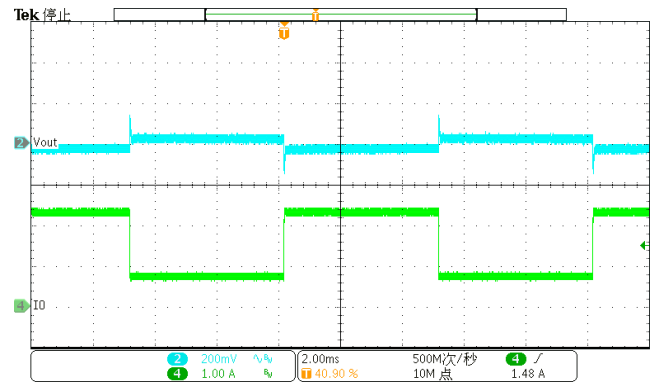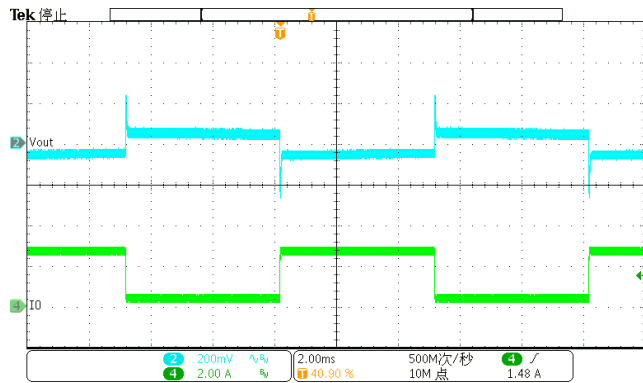


1.

2.

3.

4.

BOTTOM VII

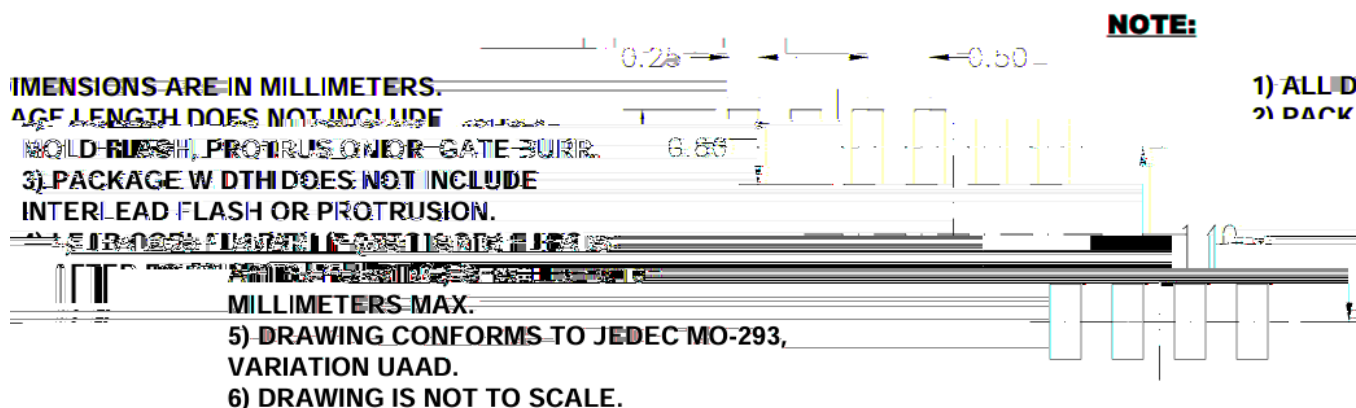

RECOMMENDED LAND PATTERNS

Technical drawing of a mechanical part, likely a wheel or hub, showing a front view and a cross-sectional view.

Front View Dimensions:

- Outer Diameter: $\phi 180_{-3}^{0}$
- Central Hole Diameter: $\phi 20_{-0.01}^{0}$
- Central Hub Diameter: $\phi 13.00 \pm 0.20$
- Spoke Width: 2.30 ± 0.10
- Spoke Angle: 120°

Cross-sectional View Dimensions:

- Thickness: 2.30 ± 0.10
- Central Hole Diameter: $\phi 21.0 \pm 0.40$
- Spoke Angle: 120°

SCALE 2:1

